


# Aribell

*The Leader in Door & Window Components*

## **Aribell High Performance SDL Tapes**

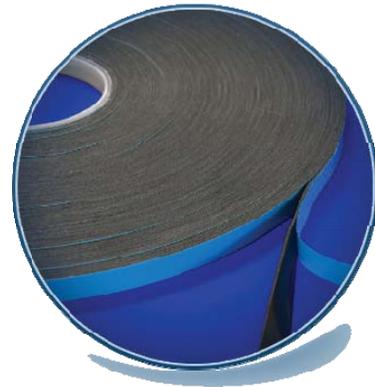

***Aribell Simulated Divided Lite (SDL) tapes have been specifically developed to provide all around secure and waterproof bonding to wood, glass, pvc, steel and composite door and window applications. Our tapes will endure a wide range of weather and environmental conditions and demanding applications.***

***Aribell tapes have been approved and used in European and North American markets for over 15 years.***

- ***Fantastic adhesion to painted Wood, Glass and SDL Bar surfaces.***
- ***100% waterproof bond.***
- ***Excellent resistance to stress and vibration***
- ***Compensates for thermal expansion and contraction.***
- ***Resists UV exposure.***
- ***Broad range of heat resistance from sub zero to high temperature.***
- ***Simple to apply.***
- ***Tape thickness is always consistent.***
- ***Available in a range of standard widths or in custom widths.***



# Aribell

*The Leader in Door & Window Components*

## **CustomLink 3493:**

*High performance SDL tape, designed and developed specifically for muntin bar fixing, bonding and mounting. CustomLink utilises a high density, closed cell polyolefin core with a high performance, solvent free, pure acrylic adhesive coated to both sides.*

### Product Profile



**Total thickness (excl liner)** - 0.040" (40 mil, 1/32", 1.0mm)  
**Temperature resistance** - -20°F to 175°F (-29°C to 79°C)

**LINER.** Siliconized polyfilm (pp co-ex) liner  
Thickness - 3.5mil, Colour - Blue.

**ADHESIVE.** Permanent, high performance,  
solvent free, pure acrylic.

**CARRIER.** High density, polyolefin foam  
Thickness - 20mil, Colour: Dark Grey.

**ADHESIVE.** Permanent, high performance,  
solvent free, pure acrylic.

- **Good Assembly tack, to provide high quality, consistent production processes.**
- **Excellent adhesion to glass and to other SDL grill substrates and surfaces.**
- **High performance bonding system, to ensure the grill is not pulled away from the sash.**
- **Highly elastomeric construction, so as to absorb differential expansion and contraction.**
- **High deposition adhesive layer, to prevent water penetration.**
- **High density, closed cell polyolefin carrier, to ensure application ease.**
- **No primers necessary, just proper preparation.**
- **A proven, high performance, pure acrylic adhesive, highly resistant to environmental factors, including temperature, UV exposure, cleaning agents, high humidity.**




# Aribell

*The Leader in Door & Window Components*

## **ProLink 1000:**

*High performance SDL tape, designed and developed specifically for muntin bar fixing, bonding and mounting where a transparent solution is required. ProLink utilizes a pure acrylic adhesive system (no carrier) with quick stick properties and excellent bond strength.*

### Product Profile

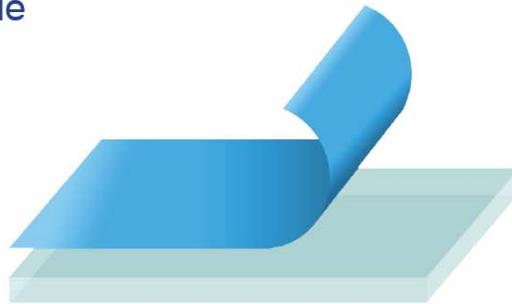

**LINER.** Siliconized pp (co-ex) liner  
Thickness - 4.5mil, Colour - Blue

**ADHESIVE.** Permanent, high performance,  
solvent free, pure acrylic.  
Transparent

**Total thickness (excl liner) - 0.040" (40 mil, 1/32", 1.0mm)**

**Temperature resistance - -40°F to 248°F (-40°C to 120°C)**

- ***Good Assembly tack, to provide high quality, consistent production processes.***
- ***Excellent adhesion to glass and to other SDL grill substrates and surfaces.***
- ***High performance bonding system, to ensure the grill is not pulled away from the sash.***
- ***Highly elastomeric construction, so as to absorb differential expansion and contraction.***
- ***High deposition adhesive, to prevent water penetration.***
- ***Made of transparent, pure acrylic.***
- ***No primers necessary, just proper preparation.***
- ***A proven, high performance, pure acrylic adhesive, highly resistant to environmental factors, including temperature, UV exposure, cleaning agents, high humidity.***




# Aribell

The Leader in Door & Window Components

## **ProLink 1500:**

*High performance tape, designed and developed specifically for sealing door lite frames. ProLink utilizes a pure acrylic adhesive system (no carrier) with quick stick properties and excellent bond strength.*

### Product Profile

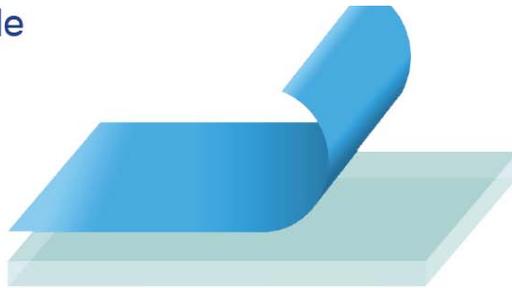

**LINER.** Siliconized pp (co-ex) liner  
Thickness - 4.5mil, Colour - Blue

**ADHESIVE.** Permanent, high performance,  
solvent free, pure acrylic.  
Transparent

**Total thickness (excl liner) - 0.059" (59 mil, 1/16", 1.5mm)**

**Temperature resistance - -40°F to 248°F (-40°C to 120°C)**

- ***Good Assembly tack, to provide high quality, consistent production processes.***
- ***Excellent adhesion to glass and to other SDL grill substrates and surfaces.***
- ***Highly elastomeric construction, so as to absorb differential expansion and contraction.***
- ***High deposition adhesive, to prevent water penetration.***
- ***Made of transparent, pure acrylic.***
- ***Ideal for use on Woodgrain and Painted panels.***
- ***Provides a virtually invisible siteline and will not ooze out in hot temperatures.***
- ***No primers necessary, just proper preparation.***
- ***No need for silicon beading.***




# Aribell

The Leader in Door & Window Components

## **FlexLink 1100:**

High performance SDL tape, designed and developed specifically for muntin bar fixing, bonding and mounting where a white solution is required. FlexLink utilizes a pure acrylic adhesive system (no carrier) with quick stick properties and excellent bond strength.

### Product Profile

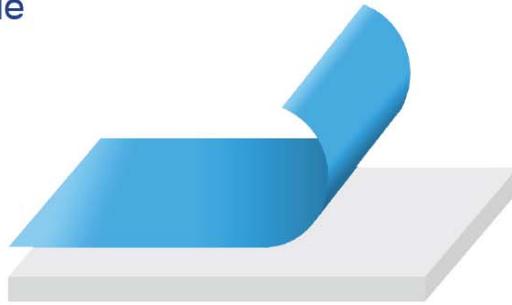

**LINER.** Siliconized polyfilm (pp co-ex) liner  
Thickness - 4.5mil, Colour - Blue.

**ADHESIVE.** Permanent, high performance, solvent free, pure acrylic foam.  
Colour - White.

Total thickness (excl liner) - 0.045" (43 mil, 3/64", 1.1mm)

Temperature resistance - -40°F to 248°F (-40°C to 120°C)

- **Good Assembly tack, to provide high quality, consistent production processes.**
- **Excellent adhesion to glass and to other SDL grill substrates and surfaces.**
- **High performance bonding system, to ensure the grill is not pulled away from the sash.**
- **Highly elastomeric construction, so as to absorb differential expansion and contraction.**
- **High deposition adhesive, to prevent water penetration.**
- **Made of white, pure acrylic foam.**
- **No primers necessary, just proper preparation.**
- **A proven, high performance, pure acrylic adhesive, highly resistant to environmental factors, including temperature, UV exposure, cleaning agents, high humidity.**