


TITE SEAL™ FOAM SELF-ADHESIVE FOAM THRESHOLD SEALER

- Creates a Gasket Under the Threshold
- Keeps Out Air and Moisture
- Eliminates the Need for Caulk
- Adheres to Wood, Concrete, and Metal



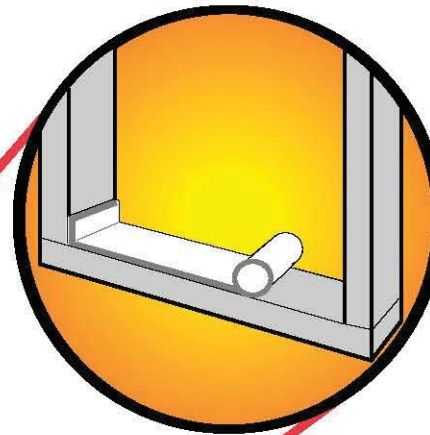

Aribell
The Leader In Door & Window Components




PREMIUM GRADE SELF-ADHESIVE FOAM THRESHOLD SEALER

INSTRUCTIONS:

1. Be sure door jamb is clean, dry and level before applying foam gasket.
2. Unroll gasket material and center over door jamb.
3. Remove release paper and firmly press gasket material in place.
4. In order to insure a complete seal, extend gasket material a minimum of 1/2 inch up both sides of the door jamb.
5. Set threshold in place, following manufacturer's instructions.
6. Trim off excess gasket material.
7. To fill larger voids, Tite Seal Foam may be placed on top of itself to double thickness. Be sure to remove release paper between layers.

CAUTION: Do not use caulks or sealants containing solvents, VOCs, or mineral spirits below, around or over Tite Seal Foam.

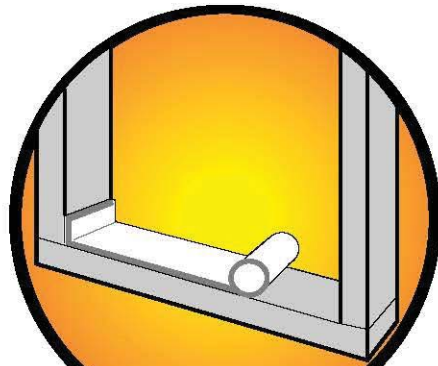

TSM42 5.5" X 3.5' roll
TSM65 5.5" X 6.5' roll
TSM25 5.5" X 25' roll

TSM42	5.5" x 42"	12 rolls/case
TSM65	5.5" x 6.5'	12 rolls/case
TSM25	5.5" x 25'	4 rolls/case



Aribell Products Limited
71 Whitmore Road, Units 1 & 2
Woodbridge ON L4L 8G5
Tel:905.669.5001; Fax:905.669.5030
www.aribell.ca