



Effective July 2020



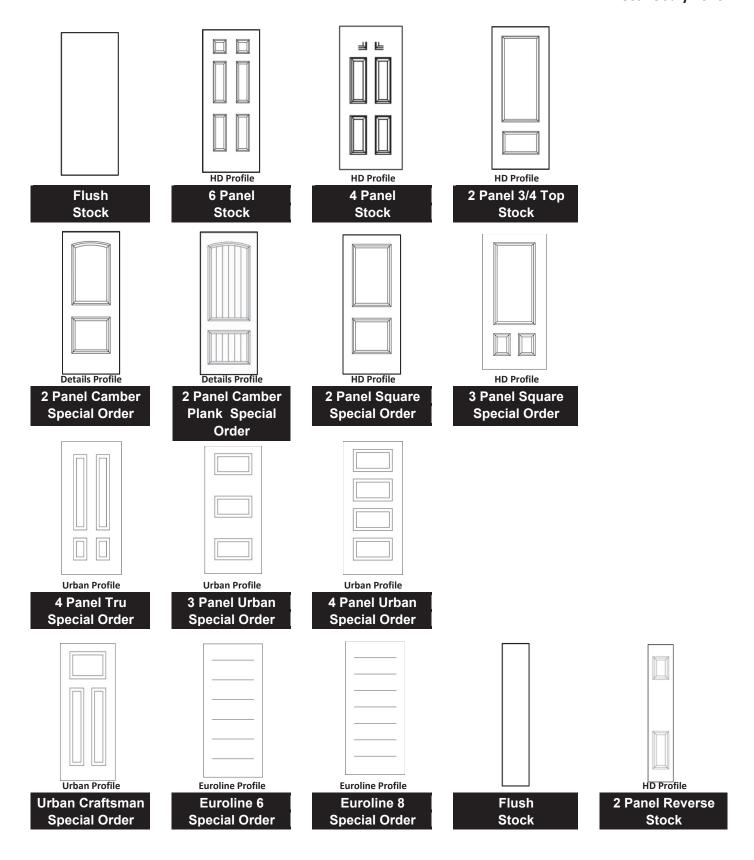

Effective June 2020

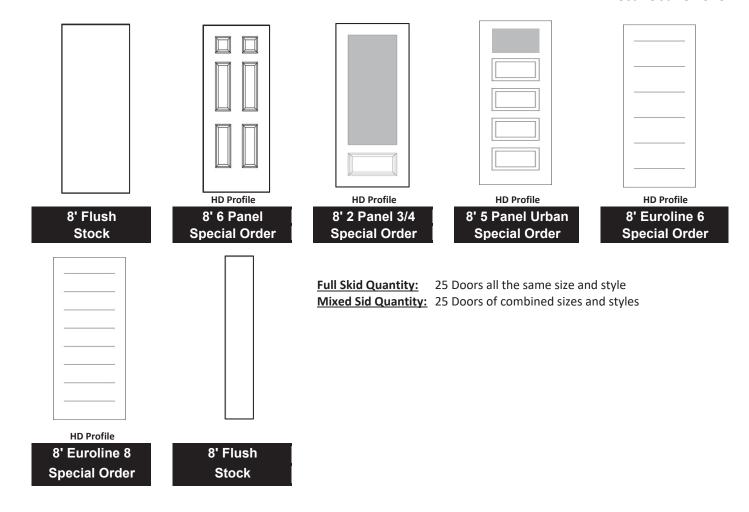

6/8Doors Standard Hardware Preparation:

1. Hinge Preparation: - Doors are supplied hinged prepped for three 4" hinges.

2. Lock Boring: - 2 1/8" face bore with 1" edge bore standard
3. Backset: - 2 3/8" standard on 2'6" and 2'8" door widths

- 2 3/4" standard on 2'10" and 3'0" door widths

4. Deadbolt Boring: - 2 1/8" face bore with 1" edge bore (1-5/8" available if specified).

5. Latch Preparation: - Available in radius mortise or no latch prep

8/0 Doors Standard Hardware Preparation:

1. Hinge Preparation: - Doors are supplied hinged prepped for four 4" hinges.

2. Lock Boring: - 2 1/8" face bore with 1" edge bore standard
 3. Backset: - 2 3/8" standard on 2'6" and 2'8" door widths
 - 2 3/4" standard on 2'10" and 3'0" door widths

4. Deadbolt Boring: - 2 1/8" face bore with 1" edge bore (1-5/8" available if specified).

5. Latch Preparation: - Available in radius mortise or no latch prep

Notes:

- 1. 2 Panel 3/4 open 8'0 door only available with 23" x 65" cut out.
- 2. No fire rating on 8/0 doors
- 3. Narrow emboss is standard on 6 Panel 2'6" doors
- 4. 20 minute positive pressure fire rating available on all 6/8 24 GA wood edge styles except 4 panel.
- 5. Lead time for Special Order doors is approximately 3 Weeks