




THR PE Tape Series for Surface Protection

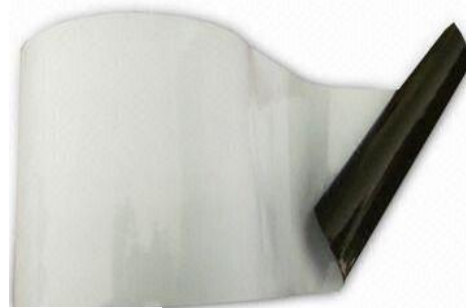

Protection Film for all your painted or plain profiles comes in various sizes and can be customized with your company logo. Can also be used for door slabs

Window & Door Sill Tape

Stock Sizes: 150 mic T x 3" or 6" W x 217' L (Super adhesion) 15 Rolls / case

Item No.	Color	Thickness (Micron, by Average)	180° Peel Strength (g/25mm, by Average)	Elongation at Break (%)	Tensile Strength (MPa)
THR-Tape White	Black/White	150u	650g/25mm	≥200%	> 5MPa

Main Application: This THR PE tape is especially designed to provide surface protection for Window sill and Door sill. This film should be applied within six months from the date of delivery and should be removed from window and door sill within 30* days from the date of application.

Duration: Should you require longer protection or use under certain climate or high traffic conditions, we suggest to double-up the film to 2 or 3 layers, to provide the extra protection needed.

***Note:** For all our products, tests should be conducted by applicators under actual applications conditions before commercial use.

