


NEW NAFS FX Outswing sill system


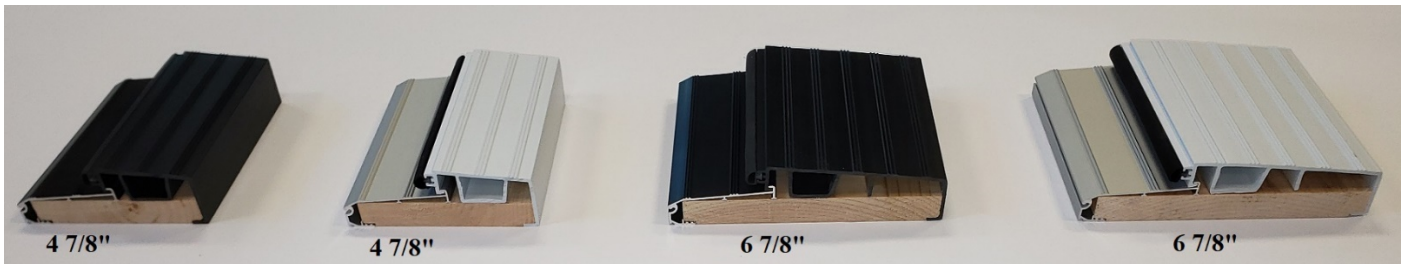


Anodized Aluminum (in clear or black) outside.


Rigid PVC extrusion (in white or black) inside.

Silicone based weather strip- stays soft even in sub-zero temperatures.


Same aluminum extensions as used in FX low profile inswing system.

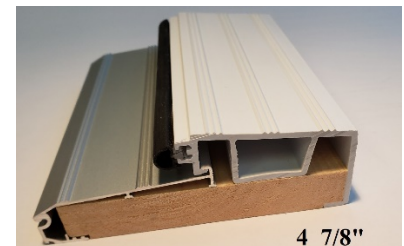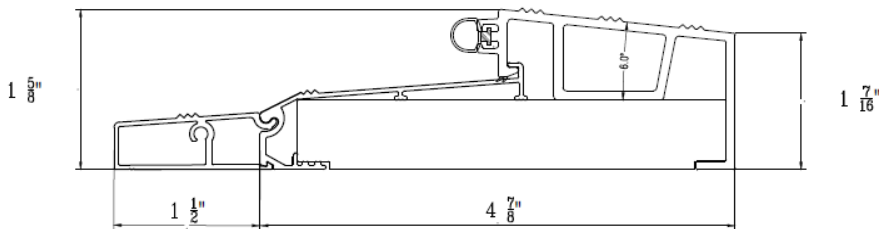


4 7/8"

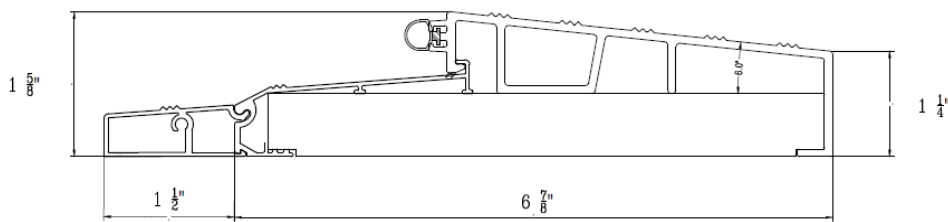

6 7/8"



2"



3 1/2"

NAFS FX Outswing sill system

Assembled sills:

Part #	Description	Length
FXO-S478-109ASCL	4 7/8" anodized clear with white cap	109"
FXO-S478-109ASBL	4 7/8" anodized black with black cap	109"
FXO-S678-109ASCL	6 7/8" anodized clear with white cap	109"
FXO-S678-109 ASBL	6 7/8" anodized black with black cap	109"

Extensions:

Part #	Description	Length	Box Qty.
FXLPEXT1.5-CA146	1 1/2" extension anodized clear	146"	12
FXLPEXT1.5-BL146	1 1/2" extension anodized black	146"	12
FXLPEXT2-CA146	2" extension anodized clear	146"	12
FXLPEXT2-BL146	2" extension anodized black	146"	12
FXLPEXT3.5-CA146	3 1/2" extension anodized clear	146"	8
FXLPEXT3.5-BL146	3 1/2" extension anodized black	146"	8