




Weather Stripping

Foam Compression Weather Stripping: Standard Reach (.650")

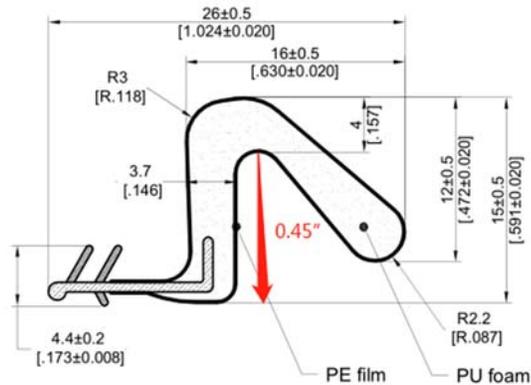

Features:


- ▶ .650" reach designed for standard 1-3/4" thick Steel, Fiberglass and Wood Doors.
- ▶ Fits all standard door jambs with .125" Kerf Width and .438" Rabbet depth.
- ▶ Recommended compression of 50% and will still retain original shape.
- ▶ PU Foam with Polyethylene Liner for exceptional durability.
- ▶ Liner is UV resistant to ensure the weatherstrip's longevity.
- ▶ UL Fire rated for up to 90 minutes on steel frame and 20 minutes on wood frames.
- ▶ Passed ASTM E-331 (water) and ASTM E-283 (air) infiltration tests.
- ▶ Standard colours are White and Black; Standard Lengths are 85" and 97". Brown and Beige available by special order with extended lead time.
- ▶ Packaged 150 pcs/box; 3750 pcs/skid.

	<u>White</u>	<u>Black</u>
<u>Length</u>	<u>Part #s</u>	
85"	WSFC650-WH85	WSFC650-BL85
97"	WSFC650-WH97	WSFC650-BL97



Foam Compression Weather Stripping: Proud Edge (.675") reach

NEW PROUD EDGE design allows a tighter seal while still allowing the door to easily close.

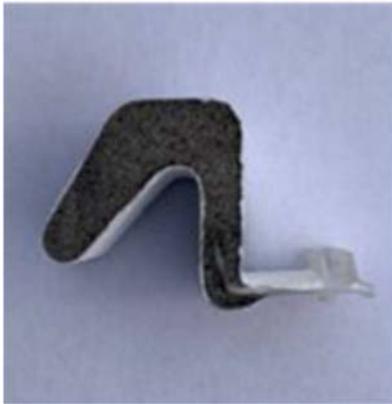

Features:

- ▶ New Proud Edge design increases contact with the face of the door panel, eliminating air and water infiltration even when subjected to high air pressure.
- ▶ Fits all standard door jambs with .125" Kerf Width and .438" Rabbet depth.
- ▶ Recommended compression of 50% and will still retain original shape.
- ▶ PU Foam with Polyethylene Liner for exceptional durability.
- ▶ Liner is UV resistant to ensure the weatherstrip's longevity.
- ▶ UL Fire rated for up to 90 minutes on steel frame and 20 minutes on wood frames.
- ▶ Passed ASTM E-331 (water) and ASTM E-283 (air) infiltration tests.
- ▶ Standard colours are White and Black; Standard Lengths are 85" and 97". Brown and Beige available by special order with extended lead time.
- ▶ Stocked in white and black.
- ▶ Packaged 125 pcs/box; 3125 pcs/skid.


	<u>White</u>	<u>Black</u>
<u>Length</u>	<u>Part #s</u>	
85"	WSPE675-WH85	WSPE675-BL85
97"	WSPE675-WH97	WSPE675-BL97



Foam Compression Weather Stripping: Low-Wick/Proud Edge (PE-650)

Two ***Major Improvements*** over traditional foam weatherstrip:

- Proud Edge Design
- Low Wick Foam Formulation

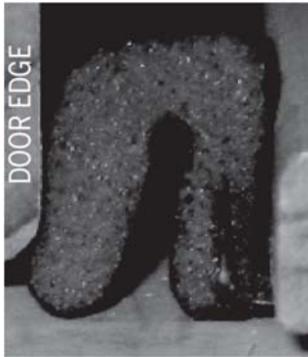

ARIBELL - PE650



Traditional .650 reach weatherstrip

Features:

- ▶ New Proud Edge design increases contact with the face of the door panel, eliminating air and water infiltration even when subjected to high air pressure.
- ▶ The patented, exclusive to Endura, new Low-Wick Foam formulation uses a combination of closed-cell and open-cell structure.
- ▶ As moisture wicks into the foam, its travel and subsequent volume is limited once it contacts the closed cells. This is especially important in cold Canadian climates where the weather stripping can freeze when saturated.
- ▶ Low-wick foam absorbs 50% less water than standard open-cell foam weather stripping.
- ▶ PE650 weather stripping is 60% stiffer than traditional foam weather stripping. This is due to the larger cross section at the elbow.
- ▶ Stocked in white and black.
- ▶ Packaged 100 pcs/box; 1800 pcs/skid.




	<u>White</u>	<u>Black</u>
<u>Length</u>	<u>PART #s</u>	
81"	PE650LW-WH6/8	PE650LW-BL6/8
97"	PE650LW-WH8/0	PE-650LW-BL8/0



Foam Magnetic Weather Stripping

Foam magnetic weather stripping combines the benefits of a foam compression seal with the benefits of a magnetic seal for better protection from air and water infiltration.

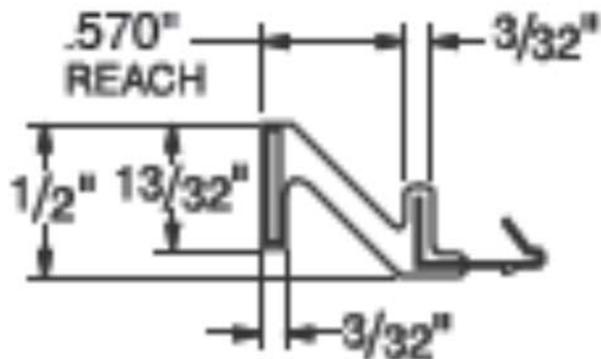

Features:



- ▶ Magnetic seal adheres tightly to steel doors preventing air and water infiltration.
- ▶ Foam compression feature accommodates movement of the door panel while still maintaining a tight seal.
- ▶ **Pre-notched for a tight seal at the top corner.**
- ▶ Colours: white and black.
- ▶ Lengths: 85" and 97".
- ▶ 75 pcs/carton

	<u>White</u>	<u>Black</u>
<u>Length</u>	<u>Part #s</u>	
85"	WSMAG570-WH85	WSMAG570-BL85
97"	WSMAG570-WH97	WSMAG570-BL97



Finned Corner Seal

Proven to prevent leaks.

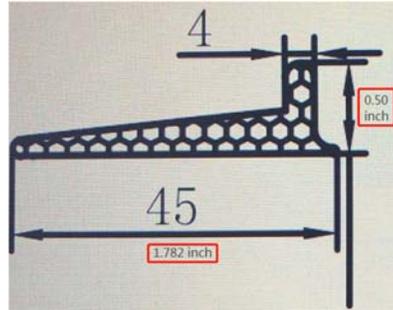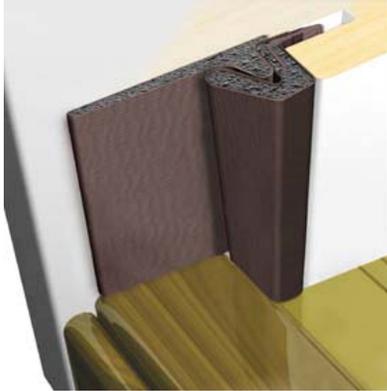


Features:

- ▶ **Raised Corner Pad Fin** - Raised fin tucks behind the weatherstrip to block water from travelling up the interior channel of the weatherstrip.
- ▶ **Designed to work with foam Weatherstrip** to create an air and water tight seal at the crucial corners.
- ▶ Pre-applied adhesive backing for easy installation.
- ▶ Packaged 2,000 pcs/box

Part #	Colour
WSCSFIN-WH	White
WSCSFIN-BL	Black

Wedge Corner Seal

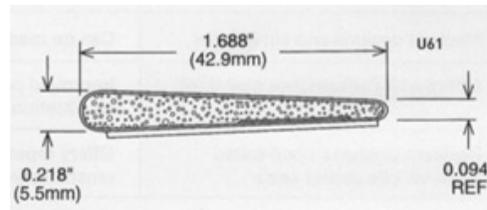


Features:

- ▶ Wedge corner seal protects against air and water infiltration.
- ▶ For use with magnetic weather stripping.
- ▶ Polyethylene wrap matches foam compression and foam magnetic stripping.
- ▶ Pre-applied adhesive backing for easy installation.
- ▶ Stocked in white, beige, brown and black
- ▶ Packaged 2,000 pcs/box.


Part #	Colour
AB-Q-FDPWH	White
AB-Q-FDPBE	Beige
AB-Q-FDPBR	Brown
AB-Q-FDPBL	Black



Polyflex Back-up Weather Stripping

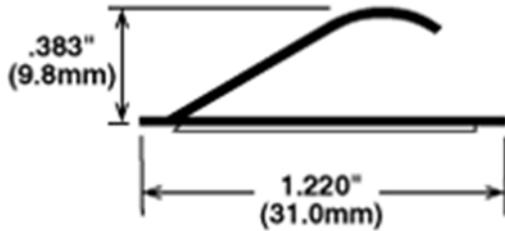

Part #: PF512



Part #: PF24

Features:

- ▶ Extruded polypropylene seal provides a secondary seal against air and water infiltration.
- ▶ Resistant to rot, mildew, corrosion and UV deterioration.
- ▶ Pre-applied adhesive backing for easy installation.
- ▶ Available in white or black.
- ▶ Standard length is 84".
- ▶ PF512 is packaged 100 pcs/ box.
- ▶ PF524 is packaged 250 pcs/ box.

<u>Part #</u>	<u>Height</u>	<u>Colour</u>
PF512-WH	.383"	White
PF512-BL	.383"	Black
PF524-WH	.200"	White
PF524-BL	.200"	Black